

# McGraw-Edison®



## PFM GALLERIA AND POLE COMBO

400 - 1000W

Metal Halide

20' - 30'

Square Straight Steel  
Pole


### POLE AND FIXTURE COMBO

- Formed aluminum housing with stamped reveal has interior-welded seams for structural integrity and is finished in premium TGIC polyester powder coat
- Ballast tray is hard-mounted to housing interior for cooler operation
- Spun and stamped aluminum reflector. Rotatable optics standard
- Formed aluminum door has heavy-duty hinges, captive retaining screws and is finished in premium TGIC polyester powder coat
- Long-life core and coil ballast
- Convex tempered glass lens or flat glass
- U.L. listed for wet locations. CSA certified

### DESCRIPTION

The McGraw-Edison Galleria Pole fixture combo features all you need for easy selection and installation of a full site lighting package. A square straight steel pole, 11 1/2" arm and necessary anchorage accompany the high quality formed aluminum Galleria housing. Available in single or dual fixture combinations.

### DIMENSIONS

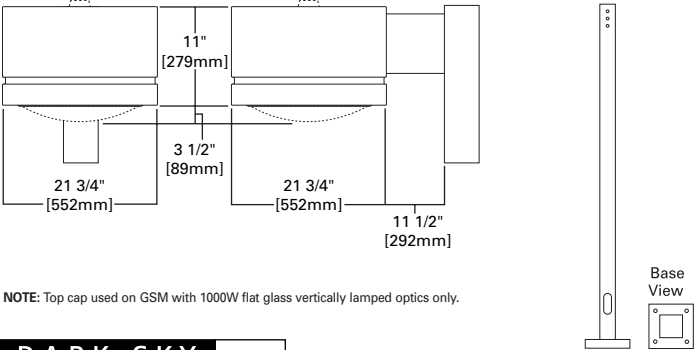

In all flat glass configurations.

E.P.A. 3.12

### ORDERING INFORMATION

SAMPLE NUMBER: PFM140SMS20

Series	No. of Fixtures	Lamp Wattage	Distribution	Lamp Source	Lens Type	Pole Height (ft.)	Zone <sup>1</sup>	Options
PFM=Galleria Square Medium	1=1	40=400W 1K=1000W	S=Area Square 3=Type III Vertical	M=Metal Halide	F=Flat Glass S=Sag Glass	20=20' 25=25' 30=30'	9=90 mph 0=100 mph	N/AB=No Anchor Bolts (Used when ordered separately)

#### SINGLE FIXTURE [FLAT GLASS]


Catalog Number	Distribution	80 MPH Zone	90 MPH Zone <sup>1</sup>	100 MPH Zone <sup>1</sup>
20' 400W MH (Square Straight Steel—4" Shaft)	Area Square	PFM140SMF20	PFM140SMF20	PFM140SMF20
	Type III Vertical	PFM1403MF20	PFM1403MF20	PFM1403MF20
25' 400W MH (Square Straight Steel—4" Shaft & 5" Shaft <sup>2</sup> )	Area Square	PFM140SMF25	PFM140SMF25	PFM140SMF250 <sup>2</sup>
	Type III Vertical	PFM1403MF25	PFM1403MF25	PFM1403MF250 <sup>2</sup>
25' 1000W MH (Square Straight Steel—4" Shaft & 5" Shaft <sup>2</sup> )	Area Square	PFM11KSMF25	PFM11KSMF25	PFM11KSMF250 <sup>2</sup>
	Type III Vertical	PFM11K3MF25	PFM11K3MF25	PFM11K3MF250 <sup>2</sup>
30' 400W MH (Square Straight Steel—5" Shaft & 6" Shaft <sup>2</sup> )	Area Square	PFM140SMF30	PFM140SMF309	PFM140SMF300 <sup>2</sup>
	Type III Vertical	PFM1403MF30	PFM1403MF309	PFM1403MF300 <sup>2</sup>
30' 1000W MH (Square Straight Steel—5" Shaft & 6" Shaft <sup>2</sup> )	Area Square	PFM11KSMF30	PFM11KSMF309	PFM11KSMF300 <sup>2</sup>
	Type III Vertical	PFM11K3MF30	PFM11K3MF309	PFM11K3MF300 <sup>2</sup>

#### SINGLE FIXTURE [SAG GLASS]

Catalog Number	Distribution	80 MPH Zone	90 MPH Zone <sup>1</sup>	100 MPH Zone <sup>1</sup>
20' 400W MH (Square Straight Steel—4" Shaft)	Area Square	PFM140SMS20	PFM140SMS20	PFM140SMS20
	Type III Vertical	PFM1403MS20	PFM1403MS20	PFM1403MS20
25' 400W MH (Square Straight Steel—4" Shaft & 5" Shaft <sup>2</sup> )	Area Square	PFM140SMS25	PFM140SMS25	PFM140SMS250 <sup>2</sup>
	Type III Vertical	PFM1403MS25	PFM1403MS25	PFM1403MS250 <sup>2</sup>
25' 1000W MH (Square Straight Steel—4" Shaft & 5" Shaft <sup>2</sup> )	Area Square	PFM11KSMS25	PFM11KSMS25	PFM11KSMS250 <sup>2</sup>
	Type III Vertical	PFM11K3MS25	PFM11K3MS25	PFM11K3MS250 <sup>2</sup>
30' 400W MH (Square Straight Steel—5" Shaft & 6" Shaft <sup>2</sup> )	Area Square	PFM140SMS30	PFM140SMS309	PFM140SMS300 <sup>2</sup>
	Type III Vertical	PFM1403MS30	PFM1403MS309	PFM1403MS300 <sup>2</sup>
30' 1000W MH (Square Straight Steel—5" Shaft & 6" Shaft <sup>2</sup> )	Area Square	PFM11KSMS30	PFM11KSMS309	PFM11KSMS300 <sup>2</sup>
	Type III Vertical	PFM11K3MS30	PFM11K3MS309	PFM11K3MS300 <sup>2</sup>

NOTES: 1 0 or 9 are noted where needed to designate a heavier gauge pole. 2 Additional lead times may apply.

## DIMENSIONS

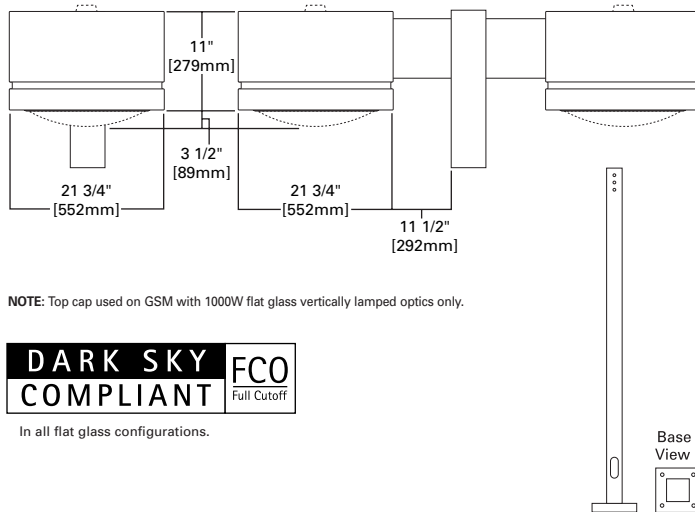

NOTE: Top cap used on GSM with 1000W flat glass vertically lamped optics only.



In all flat glass configurations.

## DESCRIPTION

The McGraw-Edison Galleria Pole fixture combo features all you need for easy selection and installation of a full site lighting package. A square straight steel pole, 11 1/2" arm and necessary anchorage accompany the high quality formed aluminum Galleria housing. Available in single or dual fixture combinations.



## PFM GALLERIA AND POLE COMBO

400 - 1000 W

Metal Halide

20' - 30'

Square Straight Steel Pole

POLE AND FIXTURE COMBO

E.P.A. 6.24

## ORDERING INFORMATION

SAMPLE NUMBER: PFM240SMS20

Series	No. of Fixtures	Lamp Wattage	Distribution	Lamp Source (Included)	Lens Type	Pole Height (ft.)	Zone <sup>1</sup>	Options
PFM=Galleria Square Medium	2=2	40=400W 1K=1000W	S=Area Square 3=Type III Vertical	M=Metal Halide	F=Flat Glass S=Sag Glass	20=20' 25=25' 30=30'	9=90 mph 0=100 mph	N/AB=No Anchor Bolts (Used when ordered separately)

### DUAL FIXTURE [FLAT GLASS]

Catalog Number	Distribution	80 MPH Zone	90 MPH Zone <sup>1</sup>	100 MPH Zone <sup>1</sup>
20' 400W MH (Square Straight Steel—4" Shaft & 6" Shaft <sup>2</sup> )	Area Square	PFM240SMF20	PFM240SMF20	PFM240SMF200 <sup>2</sup>
	Type III Vertical	PFM2403MF20	PFM2403MF20	PFM2403MF200 <sup>2</sup>
25' 400W MH (Square Straight Steel—5" Shaft & 6" Shaft <sup>2</sup> )	Area Square	PFM240SMF25	PFM240SMF25	PFM240SMF250 <sup>2</sup>
	Type III Vertical	PFM2403MF25	PFM2403MF25	PFM2403MF250 <sup>2</sup>
25' 1000W MH (Square Straight Steel—5" Shaft & 6" Shaft <sup>2</sup> )	Area Square	PFM21KSMF25	PFM21KSMF25	PFM21KSMF250 <sup>2</sup>
	Type III Vertical	PFM21K3MF25	PFM21K3MF25	PFM21K3MF250 <sup>2</sup>
30' 400W MH (Square Straight Steel—5" Shaft & 6" Shaft <sup>2</sup> )	Area Square	PFM240SMF30	PFM240SMF309 <sup>2</sup>	PFM240SMF300 <sup>2</sup>
	Type III Vertical	PFM2403MF30	PFM2403MF309 <sup>2</sup>	PFM2403MF300 <sup>2</sup>
30' 1000W MH (Square Straight Steel—5" Shaft & 6" Shaft <sup>2</sup> )	Area Square	PFM21KSMF30	PFM21KSMF309 <sup>2</sup>	PFM21KSMF300 <sup>2</sup>
	Type III Vertical	PFM21K3MF30	PFM21K3MF309 <sup>2</sup>	PFM21K3MF300 <sup>2</sup>

### DUAL FIXTURE [SAG GLASS]

Catalog Number	Distribution	80 MPH Zone	90 MPH Zone <sup>1</sup>	100 MPH Zone <sup>1</sup>
20' 400W MH (Square Straight Steel—4" Shaft & 5" Shaft <sup>2</sup> )	Area Square	PFM240SMS20	PFM240SMS20	PFM240SMS200 <sup>2</sup>
	Type III Vertical	PFM2403MS20	PFM2403MS20	PFM2403MS200 <sup>2</sup>
25' 400W MH (Square Straight Steel—5" Shaft & 6" Shaft <sup>2</sup> )	Area Square	PFM240SMS25	PFM240SMS25	PFM240SMS250 <sup>2</sup>
	Type III Vertical	PFM2403MS25	PFM2403MS25	PFM2403MS250 <sup>2</sup>
25' 1000W MH (Square Straight Steel—5" Shaft & 6" Shaft <sup>2</sup> )	Area Square	PFM21KSMS25	PFM21KSMS25	PFM21KSMS250 <sup>2</sup>
	Type III Vertical	PFM21K3MS25	PFM21K3MS25	PFM21K3MS250 <sup>2</sup>
30' 400W MH (Square Straight Steel—5" Shaft & 6" Shaft <sup>2</sup> )	Area Square	PFM240SMS30	PFM240SMS309 <sup>2</sup>	PFM240SMS300 <sup>2</sup>
	Type III Vertical	PFM2403MS30	PFM2403MS309 <sup>2</sup>	PFM2403MS300 <sup>2</sup>
30' 1000W MH (Square Straight Steel—5" Shaft & 6" Shaft <sup>2</sup> )	Area Square	PFM21KSMS30	PFM21KSMS309 <sup>2</sup>	PFM21KSMS300 <sup>2</sup>
	Type III Vertical	PFM21K3MS30	PFM21K3MS309 <sup>2</sup>	PFM21K3MS300 <sup>2</sup>

NOTES: 1 0 or 9 are noted where needed to designate a heavier gauge pole. 2 Additional lead times may apply.

- Formed aluminum housing with stamped reveal has interior-welded seams for structural integrity and is finished in premium TGIC polyester powder coat
- Ballast tray is hard-mounted to housing interior for cooler operation
- Spun and stamped aluminum reflector. Rotatable optics standard
- Formed aluminum door has heavy-duty hinges, captive retaining screws and is finished in premium TGIC polyester powder coat
- Long-life core and coil ballast
- Convex tempered glass lens or flat glass
- U.L. listed for wet locations. CSA certified